

T-TUNING



SP-FPU® keep it clean!

TRÜTZSCHLER SPINNING

www.truetzschler.com


Reduction of the cleaning cycles of the SP-FPU

The conversion of the SP-FPU to the new sealing system can significantly minimize the cleaning cycles and the resulting downtimes.

Practical results show that the cleaning intervals can be extended to up to 7 days after the conversion.

1. Conversion of the door seals
2. Retrofitting of the speed sensor seals
3. Sealing of the inner material guide ducts
4. Conversion of the cable guides with additional sealing profiles
5. Improved sealing of the inspection ducts

This conversion can be realized for all SP-FPU depending on the year of construction.

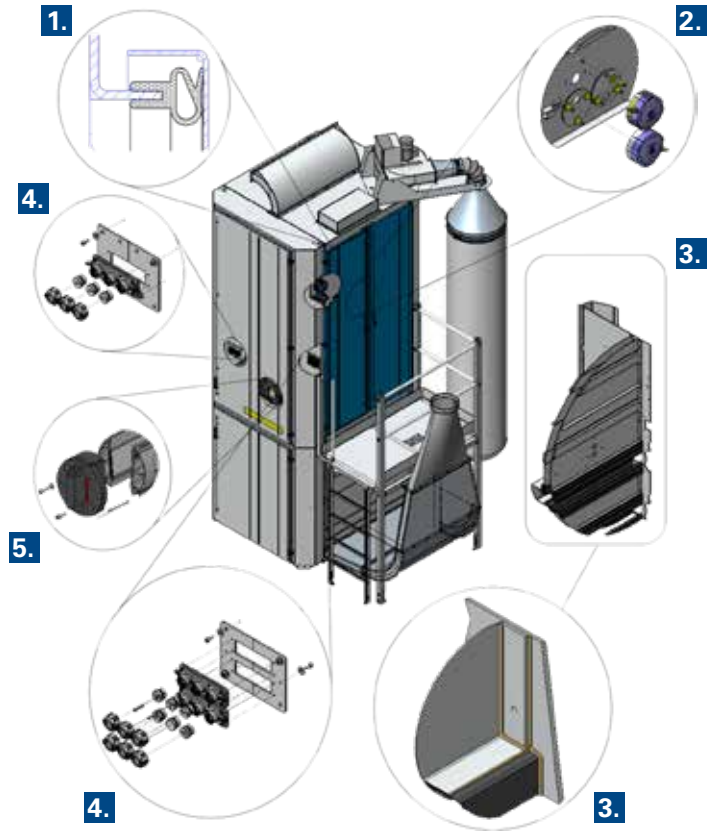

Comparison of the same machine at the same running time with and without conversion:



with conversion



without conversion

For more information, please contact: t.tuning@truetzschler.de